

Broad Band Voltage Variable Attenuator

RVA-2500+

50Ω 10 to 2500 MHz

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage(V+)	12V
Absolute Max. Control Voltage(Vctrl)	20V
Absolute Max. RF Input Level	+20 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	2
RF OUT	10
V CONTROL	6
V+	14
GROUND	1,3,4,5,7,8,9,11,12,13,15,16


Outline Drawing

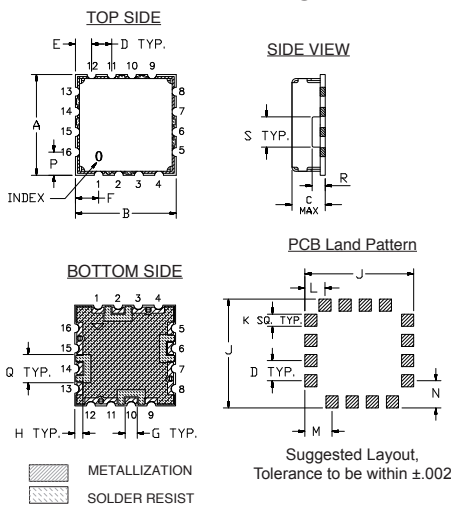

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.500	.500	.195	.100	.080	.115	.060	.040	.540
12.70	12.70	4.95	2.54	2.03	2.92	1.52	1.02	13.72
K	L	M	N	P	Q	R	S	Wt.
.060	.100	.135	.135	.115	.140	.070	.150	grams
1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.0

Demo Board MCL P/N: TB-163 Suggested PCB Layout (PL-040)

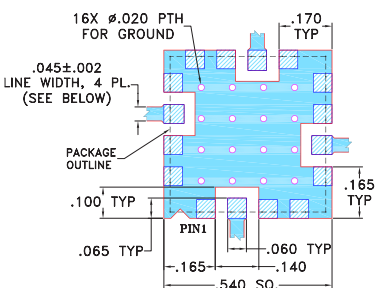

- NOTE:**
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.025" ± 0.0025"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- Legend:
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Broadband, 10-2500 MHz
- IP3, +43 dBm typ.
- 40 dB attenuation @ 1500 MHz
- Good VSWR at IN/OUT ports over attenuation range
- Minimal phase deviation over attenuation range
- No external bias and RF matching network required
- Shielded case



CASE STYLE: DV874

Applications

- Power level control
- Feed forward amplifiers

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)	MIN. INSERTION LOSS, dB (+15V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
	Min.	Max.	Typ.	Max.		Min.	Max.			Typ.	Max.
10 - 500	3.0	4.6	55	41	+20	0 - 17	30	43	20	+3 to +5	5
500 - 1500	3.3	5.0	40	30	+20	0 - 17	30	43	20	+3 to +5	5
1500 - 2500	4.0	6.2	37	25	+20	0 - 17	30	44	20	+3 to +5	5


Notes:

- Rise/Fall time: 14μSec / 25μSec Typ.
- Switching Time, turn on/off: 14μSec / 25μSec Typ.
- Improved R.Loss in/out performance can be achieved at certain frequencies by choosing a V+ between +3V to +5V

Equivalent Schematic

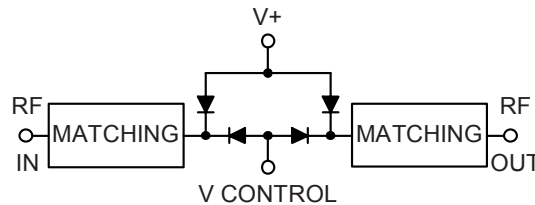

RVA-2500+ TYPICAL ATTENUATION AT 1000MHz

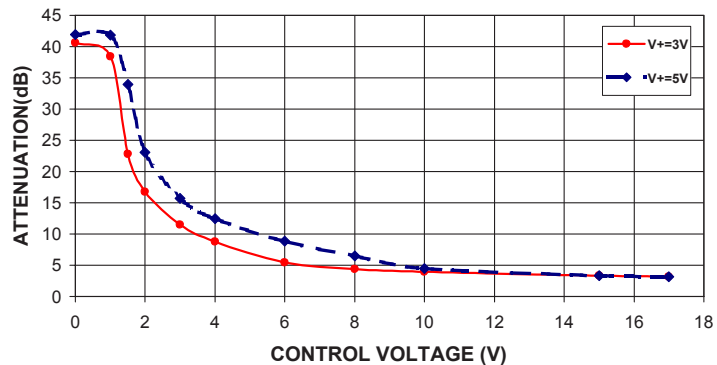


Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




RVA-2500+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

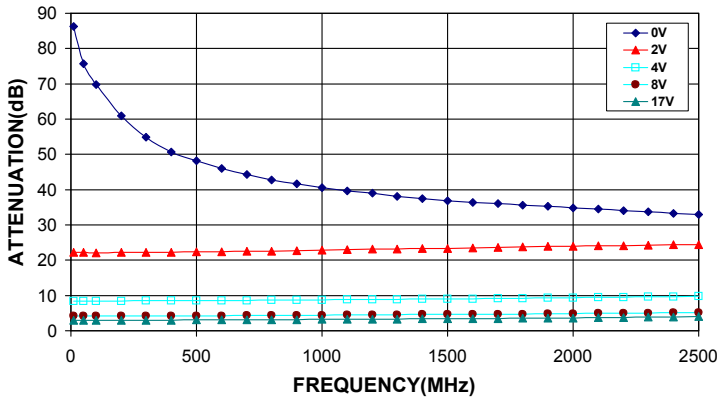


RVA-2500+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

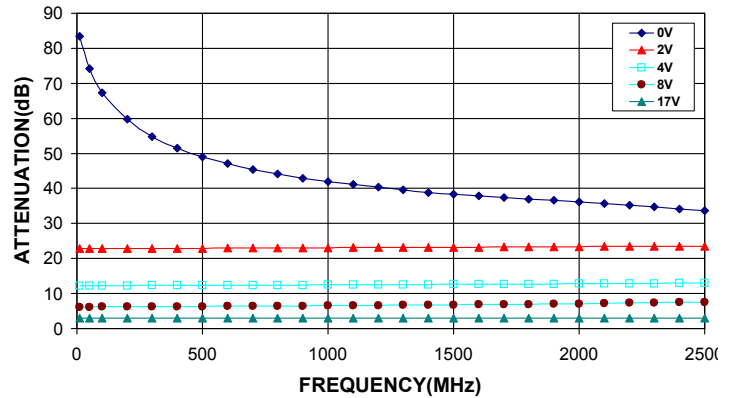


RVA-2500+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz @ V+=3V

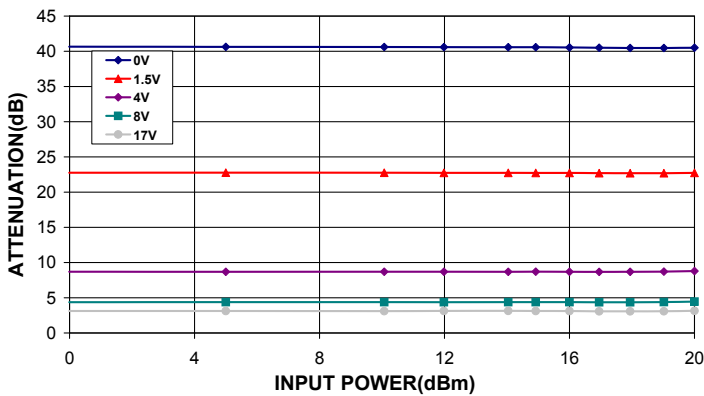


RVA-2500+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz @ V+=5V

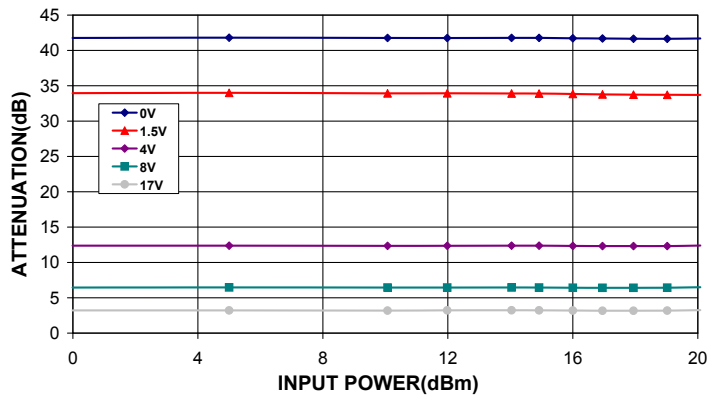

RVA-2500+
INPUT RETURN LOSS Vs. FREQUENCY
Vs. CONTROL VOLTAGE @ V+=3V

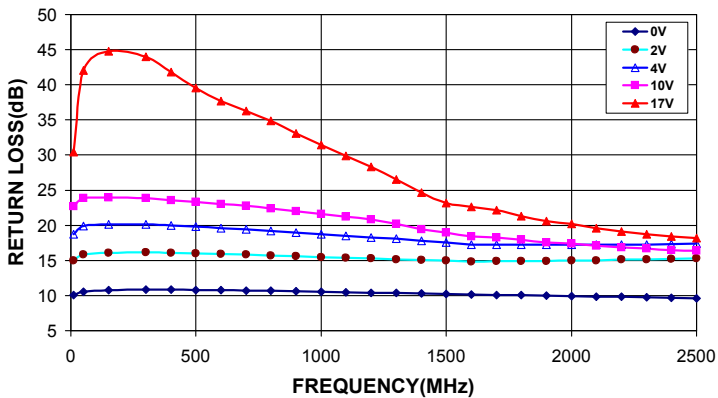

RVA-2500+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

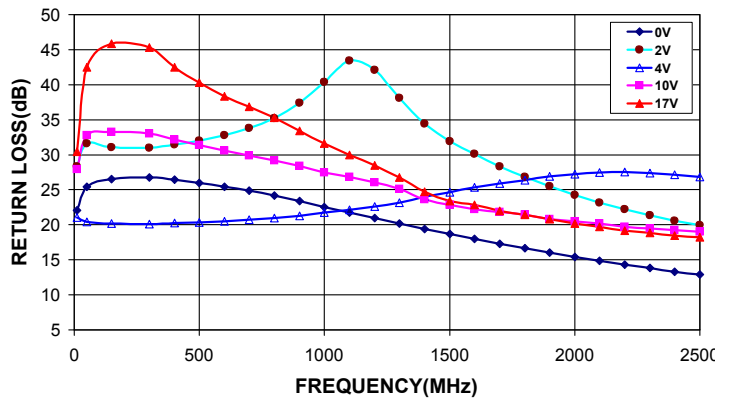


Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




RVA-2500+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

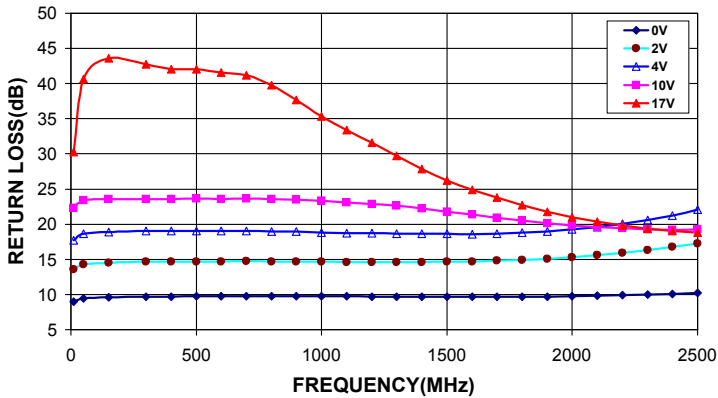


RVA-2500+
OUTPUT RETURN LOSS Vs. FREQUENCY
Vs. CONTROL VOLTAGE @ V+=5V

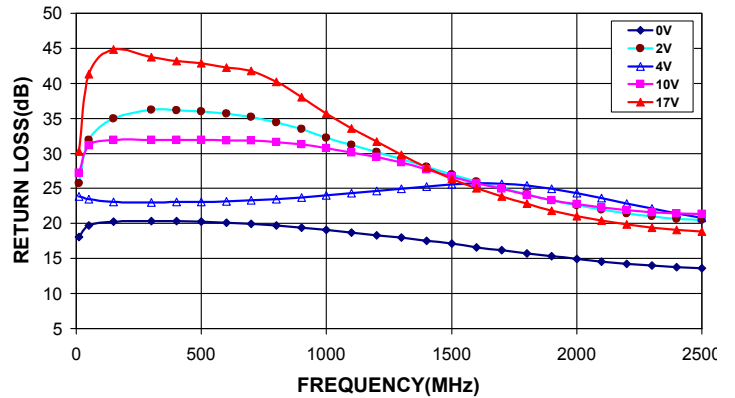


RVA-2500+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

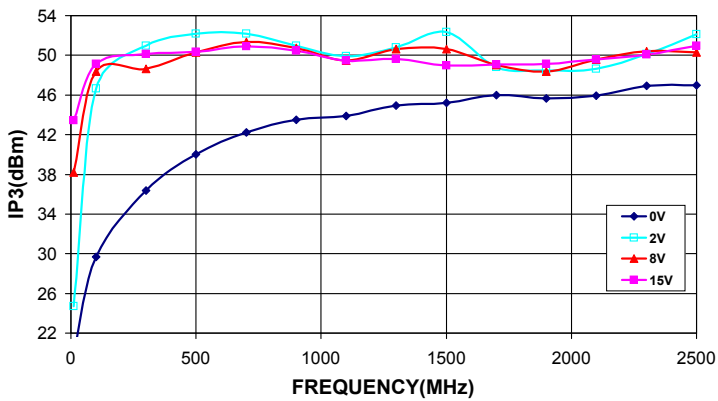


RVA-2500+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

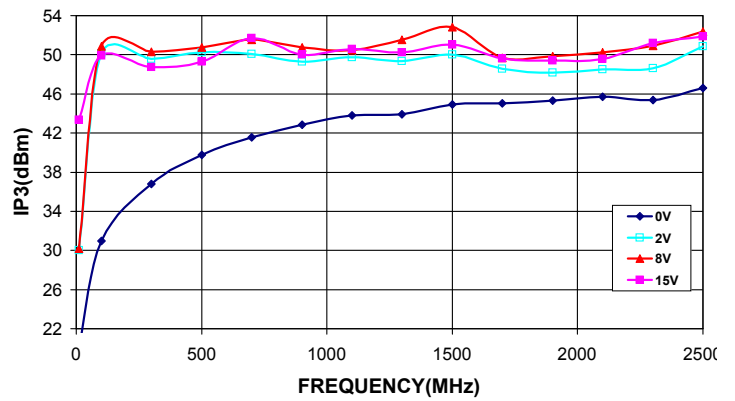

RVA-2500+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

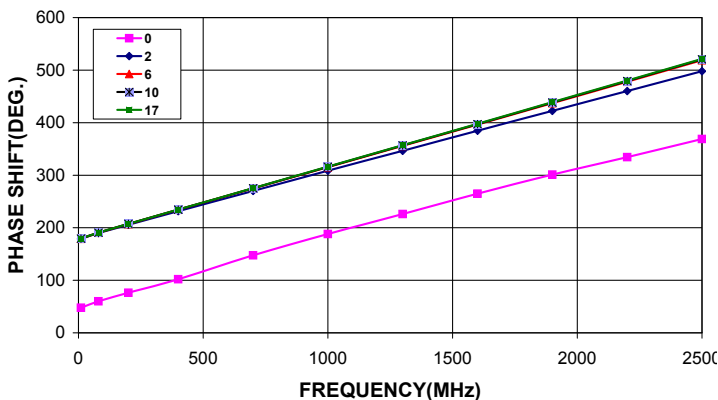

RVA-2500+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

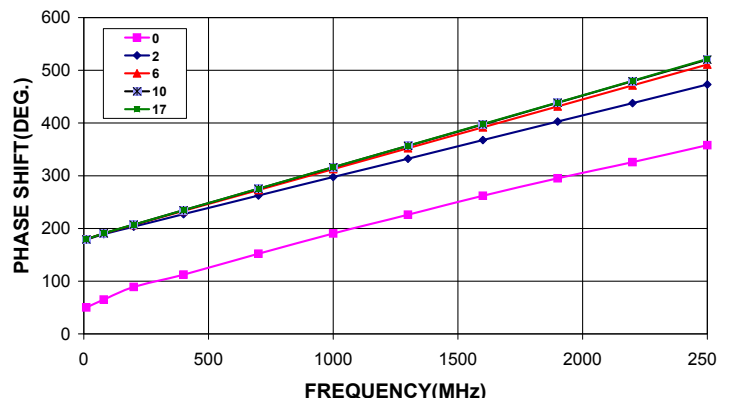

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

